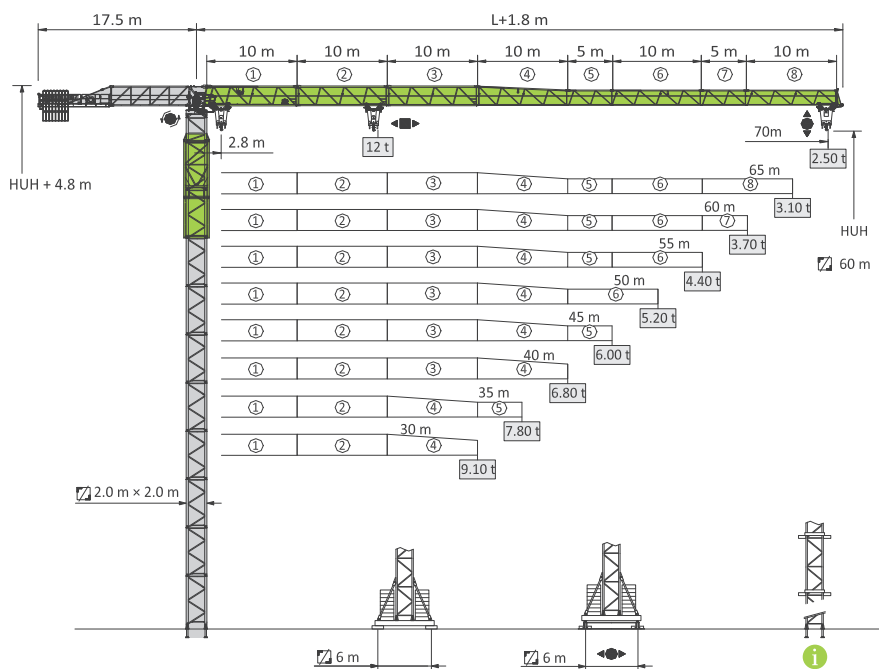
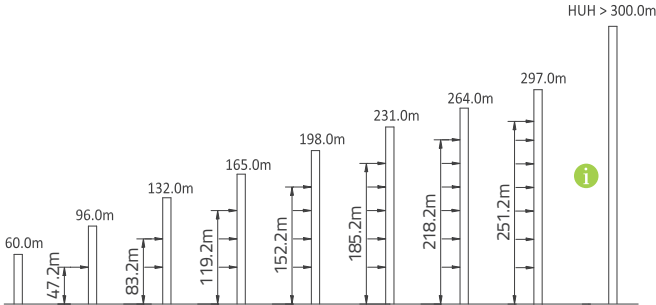
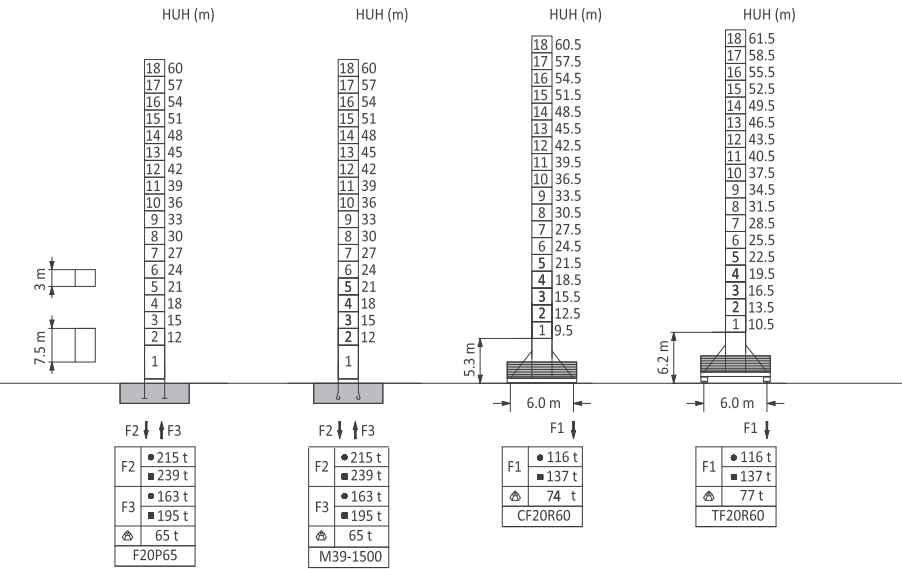


WA7025-12



塔身—反力&附着 / Mast – Reactions & Anchorages / Mast – Fundament Ecklasten & Verankerungen

2.0m – L68A WA7025-12E



Load diagrams / Lastkurven / 起重性能






 m	m / t	10.0	12.5	15.0	17.5	20.0	22.5	25.0	27.5	30.0	35.0	40.0	45.0	50.0	55.0	60.0	65.0	70.0
70.0		2.8-35.8/6	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	5.1	4.4	3.9	3.5	3.1	2.8	2.5
		2.8-19.7/12	12.0	12.0	12.0	12.0	11.5	10.0	8.8	7.9	7.1	5.9	5.0	4.4	3.8	3.4	3.0	2.7
65.0		2.8-38.7/6	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	5.7	4.9	4.3	3.8	3.4	3.1	
		2.8-21.3/12	12.0	12.0	12.0	12.0	12.0	11.0	9.7	8.7	7.9	6.6	5.6	4.8	4.2	3.8	3.3	3.0
60.0		2.8-40.8/6	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	5.3	4.6	4.1	3.7		
		2.8-22.4/12	12.0	12.0	12.0	12.0	12.0	11.7	10.4	9.3	8.4	7.0	6.0	5.2	4.6	4.0	3.6	
55.0		2.8-42.8/6	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	5.6	4.9	4.4			
		2.8-23.4/12	12.0	12.0	12.0	12.0	12.0	12.0	11.0	9.8	8.9	7.4	6.4	5.5	4.9	4.3		
50.0		2.8-44.5/6	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	5.9	5.2				
		2.8-24.3/12	12.0	12.0	12.0	12.0	12.0	12.0	11.5	10.3	9.3	7.8	6.7	5.8	5.1			
45.0		2.8-45.0/6	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0				
		2.8-25.0/12	12.0	12.0	12.0	12.0	12.0	12.0	11.9	10.7	9.7	8.1	6.9	6.0				
40.0		2.8-40.0/6	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0					
		2.8-24.6/12	12.0	12.0	12.0	12.0	12.0	12.0	11.7	10.5	9.5	8.0	6.8					
35.0		2.8-35.0/6	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0						
		2.8-24.2/12	12.0	12.0	12.0	12.0	12.0	12.0	11.5	10.3	9.3	7.8						
30.0		2.8-30.0/6	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0						
		2.8-23.6/12	12.0	12.0	12.0	12.0	12.0	12.0	11.2	10.1	9.1							

Mechanisms / Antriebe / 传动机构

380 V (± 10 %) 50 Hz							kW	
	H45FC30-600A	t	1.5	6	3	12	45	600 m 
		m/min	95	38	47.5	19		
	S75CA-130LB12/14A S75CN-130LB12/14A	r/min	0 - 0.8				2 x 7.5	
	T55FC70-b(D)	m/min	0 - 75				5.5	
	ZA52-D B52-D	m/min	0 - 25				2 x 5.2	
			65.5 kW + 2 x 5.2 kW					



平衡重 / Counter-jib ballast / Gegenauslegerballast

高度 m	3.0t	2.5t	1.3t	吊钩 (t)	PHZ3000R	PHZ2500T	PHZ1300P
70.0	4	3	1	20.8			
65.0	4	3	0	19.5			
60.0	4	3	0	19.5			
55.0	4	3	0	19.5			
50.0	4	2	1	18.3			
45.0	3	3	1	17.8			
40.0	4	1	1	15.8			
35.0	3	2	0	14.0			
30.0	3	1	1	12.8	(mm)	(mm)	(mm)









压重 / Central ballast / Zentralballast

 2.0m – L68A	CB20R60	HUH (m)	21.5	24.5	27.5	30.5	33.5	36.5	39.5	42.5	45.5	48.5	51.5	54.5	57.5	60.5
	TB20R60	HUH (m)	22.5	25.5	28.5	31.5	34.5	37.5	40.5	43.5	46.5	49.5	52.5	55.5	58.5	61.5
	吊钩 (t)		51.6	51.6	51.6	51.6	60.6	60.6	69.6	69.6	78.6	87.6	105.6	105.6	105.6	105.6



Dimensions and weight / Abmessungen und Gewicht / 运输单元

上装 / Slewing crane part / Drehender Kranteil		L (m)	B (m)	H (m)	kg (±5%)
平衡臂 Counter-jib Gegenausleger	 ①	11.0	1.27	2.49	3500
	 ②	8.13	1.27	0.56	2150
起重臂节 Jib section Auslegerelement	①	10.3	1.15	2.42	2600
	②	10.3	1.15	2.42	1810
	③	10.3	1.15	2.42	1370
	④	10.3	1.15	2.42	1130
	⑤	10.3	1.15	1.80	810
	⑥	10.3	1.15	1.80	520
	⑦	5.2	1.15	1.80	530
	⑧	5.2	1.15	1.80	320
	⑨	0.87	1.15	1.80	90
载重小车 Trolley Laufkatze		2.10	1.87	1.04	400
吊钩 Pulley block Hubflasche		1.07	0.36	1.80	530
司机室 Cabin Kabine		2.08	1.30	2.16	480
起升机构 Hoisting mechanism Hubwerk	 H45FC30-600C	2.00	1.07	0.88	1340
变幅机构 Trolleying mechanism Katzfahwerk	 T55FC70-b(D)	1.20	0.73	0.59	480
回转总成 Slewing assembly Drehteile	 2.0 m	2.56	2.44	2.29	5290

运输单元 / Dimensions and weight / Abmessungen und Gewicht /

塔身 / Crane tower / Kranturm			L (m)	B (m)	H (m)	kg (±5%)
过渡节 Transition section Übergangsstück		2.0 m - L68C3B	2.46	2.67	2.67	1770
爬升架 Climbing tower section Kletterturmstück		2.0 m - TC25P50	7.23	2.64	2.80	3970
标准节 (4片) Tower section (4 pieces) Turmstück (4 Stücke)		2.0 m - L68A4	3.28	2.04	0.70	1610
标准节 Tower section Turmstück		2.0 m - L68G23	7.76	2.06	2.00	4190
支腿 Fixing angles Verankerungsfuss		F20P65	0.45	0.45	1.19	4×185
底架基础节 Basic mast unit Grundmasteinheit		CF20R60 / TF20R60	4.5	2.37	2.37	4060
撑杆 Border support Randträger		CF20R60 / TF20R60	5.2	0.19	0.29	4×422
整梁 Main beam Hauptträger		CF20R60 / TF20R60	8.94	0.9	1.27	2180
半梁 Half beam Halbträger		CF20R60 / TF20R60	4.31	0.51	1.27	2×1056

Dimensions and weight / Abmessungen und Gewicht / 运输单元

塔身 / Crane tower / Kranturm			L (m)	B (m)	H (m)	kg (±5%)
过渡节 Transition section Übergangsstück		2.0 m - L68C3C	2.63	2.63	4.00	1571
爬升架 Climbing tower section Kletterturmstück		2.0 m - TC20P50U	7.23	3.36	1.27	1350
		2.0 m - TC20P50U	7.23	3.36	1.52	1810
标准节 (4片) Tower section (4 pieces) Turmstück (4 Stücke)		2.0 m - L68A1A	3.28	2.04	0.70	1610
标准节 Tower section Turmstück		2.0 m - L68G23-C	7.76	2.06	2.00	4194
支腿 Fixing angles Verankerungsfuss		F20P65	0.45	0.45	1.19	4×185
底架基础节 Basic mast unit Grundmasteinheit		CF20R60 / TF20R60	4.5	2.37	2.37	4060
撑杆 Border support Randträger		CF20R60 / TF20R60	5.2	0.19	0.29	4×422
整梁 Main beam Hauptträger		CF20R60 / TF20R60	8.94	0.9	1.27	2180
半梁 Half beam Halbträger		CF20R60 / TF20R60	4.31	0.51	1.27	2×1056

